

IF YOU DO NOT SEE A SIZE YOU NEED PLEASE CALL.

# ETCO

**SPECIALTY PRODUCTS, INC.**

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099  
[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

---

## DOUBLE E-LOC® COUPLING



The ETCO Double E-Loc is a locking compression coupling used to join smooth, ribbed, corrugated or Figure 8 High Density Polyethylene (HDPE) conduit. The locking, pressure-tight design makes the Double E-Loc an ideal coupling for pneumatic cable placing applications when air and watertight integrity of the system is imperative. Unmatched pressure ratings, pull-out resistance, no metal parts, and no special tools make the ETCO Double E-Loc the preferred coupling. Lock rings specially designed to grip rigid PVC and steel pipe are also available.

IF YOU DO NOT SEE A SIZE YOU NEED PLEASE CALL.



## SPECIALTY PRODUCTS, INC.

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099  
[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

### DOUBLE E-LOC®



½" TO 2" IPS



2½" TO 4" IPS

Part No.	Standard Duct Size	Length	Pieces Per Ctn.	Weight Per Ctn.
DEL-084	.084" O.D. DUCT (½" IPS)	6.25"	50	10
DEL-105	1.05" O.D. DUCT (¾" IPS)	6.25"	50	17
DEL-131	1.315" O.D. DUCT (1" IPS)	6.25"	50	26
DEL-135	1.350" O.D. DUCT	6.25"	50	63
DEL-142	1.420" O.D. DUCT / 1.460" O.D. RIBBED	6.25"	50	61
DEL-150	1.500" O.D. DUCT (1-1/2" TRUE SIDR 9)	6.25"	50	56
DEL-150UV	1.500" O.D. AERIAL	6.25"	50	56
DEL-154	1.540" O.D. DUCT / 1.575" RIBBED	6.25"	50	58
DEL-154UV	1.540" O.D. AERIAL (1-1/4" TRUE)	6.25"	50	58
DEL-157	1.570" O.D. DUCT (40MM)	6.25"	50	56
DEL-160	1.600" O.D. DUCT	6.25"	50	56
DEL-160UV	1.600" O.D. AERIAL	6.25"	50	56
DEL-166	1.660" O.D. DUCT (1-1/4" IPS)	6.25"	50	48
DEL-166G	1.660" O.D. RIBBED	6.25"	50	48
DEL-166UV	1.660" O.D. AERIAL (1-1/4" IPS)	6.25"	50	53
DEL-171	1.710" O.D. DUCT (1-1/4" SIDR 9)	6.25"	50	54
DEL-178	1.780" O.D. DUCT / 1.830" RIBBED	8.25"	25	47
DEL-178UV	1.780" O.D. AERIAL	8.25"	25	47
DEL-183	1.830" O.D. DUCT (1-1/2" SIDR 9)	8.25"	25	46
DEL-190	1.900" O.D. DUCT (1-1/2" IPS)	8.25"	25	32
DEL-190UV	1.900" O.D. AERIAL (1-1/2" IPS)	8.25"	25	32
DEL-237	2.375" O.D. DUCT (2" IPS)	8.5"	25	51
DEL-237UV	2.375" O.D. AERIAL (2" IPS)	8.5"	25	51
DEL-287	2.875" O.D. DUCT (2½" IPS)	8.5"	20	49
DEL-350	3.500" O.D. DUCT 3" IPS)	8.5"	15	43
DEL-450	4.500" O.D. DUCT (4" IPS)	8.5"	10	44

Parts labeled UV are designed for above ground applications and are UV resistant.  
METRIC sizes are also available.

\*Please contact ETCO at the above listed number if you have need of additional sizes.


# ETCO

## SPECIALTY PRODUCTS, INC.

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099

[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

## INSTALLATION INSTRUCTIONS DOUBLE E-LOC® COUPLINGS

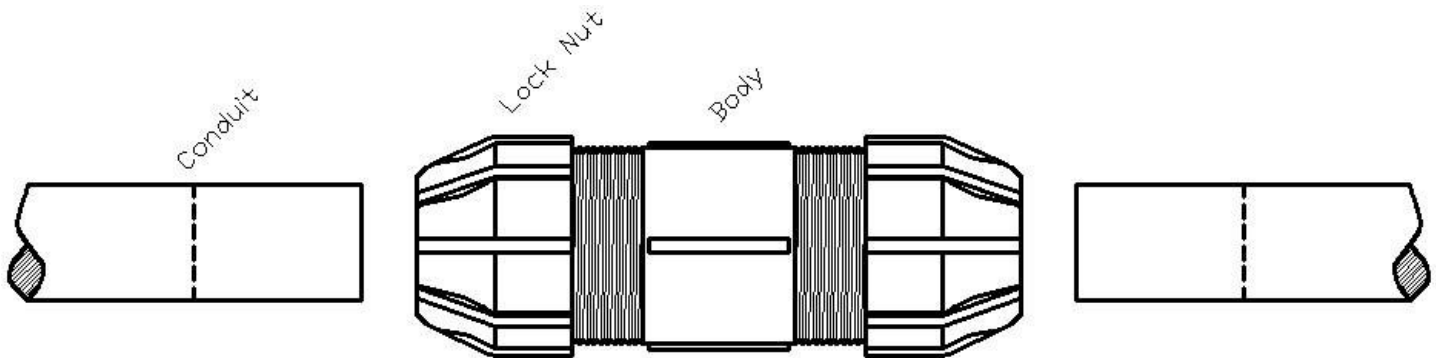


3 1/8" Mark (for 1" to 1 1/4" Double E-Loc)

3 3/8" Mark (for 1 1/2" Double E-Loc)


3 7/8" Mark (for 2" Double E-Loc)

(Typical)

Loosen Lock Nuts until 1" of thread is visible on each side of body. Mark each conduit 3 1/8" from the end (for 1" to 1 1/4" sizes), 3 3/8" from the end (for 1 1/2" sizes) or 3 7/8" from the end (for 2" sizes)

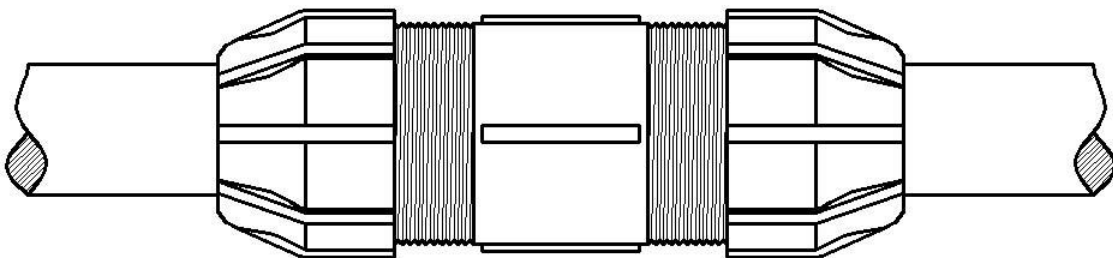

Push conduit into each end of Double E-Loc coupling body making sure the conduit is tight against the center stop.

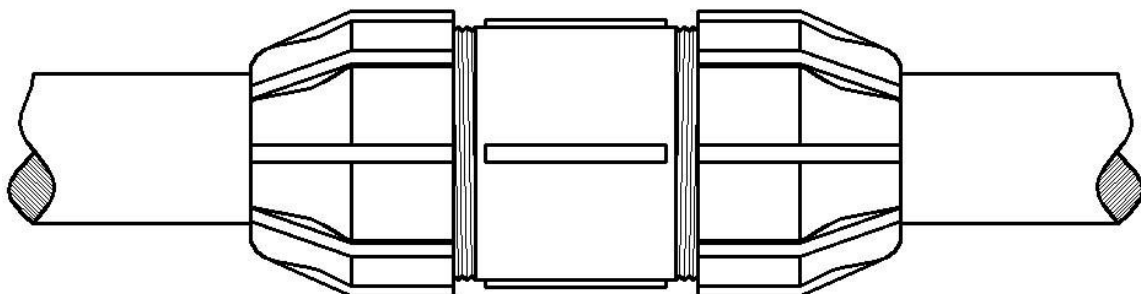



Tighten lock nut on each end of body hand tight.

**SPECIALTY PRODUCTS, INC.**

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099

[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

---

## Clear Double E-Loc



The Clear-Loc coupling is designed for easy application and allows quick installation in all types of situations, especially where tight installation conditions exist. The coupling is designed without a center stop, and the clear body allows for visual verification that the innerducts are centered and properly aligned. It is airtight and will hold air pressures of 150psi when installed properly.

Part #		Nominal Size	Color
CDEL-131	1"	1.315"	Red
CDEL-166	1¼"	1.660"	Orange
CDEL-190	1½"	1.900"	Blue
CDEL-237	2"	2.375"	Black