



## SPECIALTY PRODUCTS, INC.

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099

[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

### DOUBLE E-LOC®



½" TO 2" IPS



2½" TO 4" IPS

Part No.	Standard Duct Size	Length	Pieces Per Ctn.	Weight Per Ctn.
DEL-084	.084" O.D. DUCT (½" IPS)	6.25"	50	10
DEL-105	1.05" O.D. DUCT (¾" IPS)	6.25"	50	17
DEL-131	1.315" O.D. DUCT (1" IPS)	6.25"	50	26
DEL-135	1.350" O.D. DUCT	6.25"	50	63
DEL-142	1.420" O.D. DUCT / 1.460" O.D. RIBBED	6.25"	50	61
DEL-150	1.500" O.D. DUCT (1-1/2" TRUE SIDR 9)	6.25"	50	56
DEL-150UV	1.500" O.D. AERIAL	6.25"	50	56
DEL-154	1.540" O.D. DUCT /1.575" RIBBED	6.25"	50	58
DEL-154UV	1.540" O.D. AERIAL (1-1/4" TRUE)	6.25"	50	58
DEL-157	1.570" O.D. DUCT (40MM)	6.25"	50	56
DEL-160	1.600" O.D. DUCT	6.25"	50	56
DEL-160UV	1.600" O.D. AERIAL	6.25"	50	56
DEL-166	1.660" O.D. DUCT (1-1/4" IPS)	6.25"	50	48
DEL-166G	1.660" O.D. RIBBED	6.25"	50	48
DEL-166UV	1.660" O.D. AERIAL (1-1/4" IPS)	6.25"	50	53
DEL-171	1.710" O.D. DUCT (1-1/4" SIDR 9)	6.25"	50	54
DEL-178	1.780" O.D. DUCT / 1.830" RIBBED	8.25"	25	47
DEL-178UV	1.780" O.D. AERIAL	8.25"	25	47
DEL-183	1.830" O.D. DUCT (1-1/2" SIDR 9)	8.25"	25	46
DEL-190	1.900" O.D. DUCT (1-1/2" IPS)	8.25"	25	32
DEL-190UV	1.900" O.D. AERIAL (1-1/2" IPS)	8.25"	25	32
DEL-237	2.375" O.D. DUCT (2" IPS)	8.5"	25	51
DEL-237UV	2.375" O.D. AERIAL (2" IPS)	8.5"	25	51
DEL-287	2.875" O.D. DUCT (2½" IPS)	8.5"	20	49
DEL-350	3.500" O.D. DUCT 3" IPS)	8.5"	15	43
DEL-450	4.500" O.D. DUCT (4" IPS)	8.5"	10	44

Parts labeled UV are designed for above ground applications and are UV resistant. METRIC sizes are also available.

\*Please contact ETCO at the above listed number if you have need of additional sizes.


# ETCO

## SPECIALTY PRODUCTS, INC.

P.O. BOX 346 • GIRARD, KS 66743 • TEL: 800-356-4540 FAX: (620) 724-8099

[www.etcoproducts.com](http://www.etcoproducts.com) Email: [etco@ckt.net](mailto:etco@ckt.net)

## INSTALLATION INSTRUCTIONS DOUBLE E-LOC® COUPLINGS

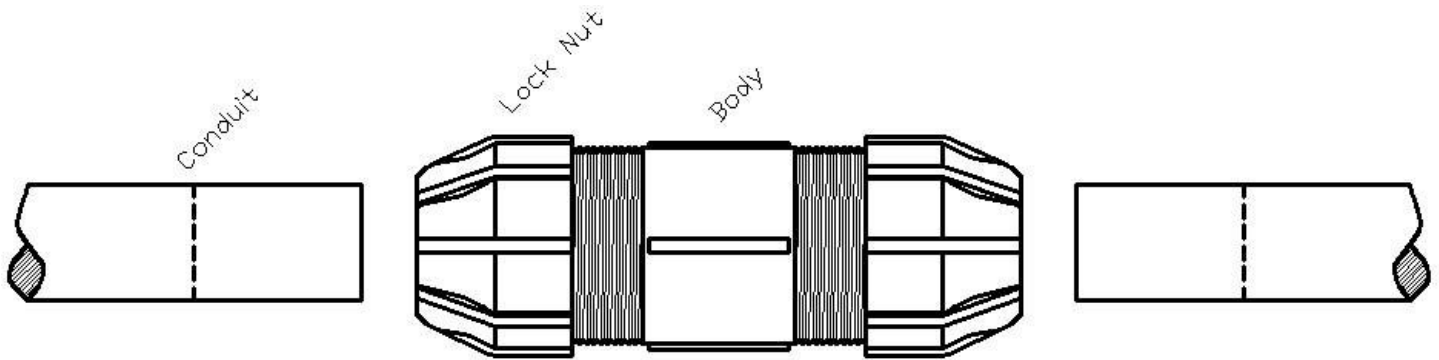


3 1/8" Mark (for 1" to 1 1/4" Double E-Loc)

3 3/8" Mark (for 1 1/2" Double E-Loc)

3 7/8" Mark (for 2" Double E-Loc)

(Typical)

Loosen Lock Nuts until 1" of thread is visible on each side of body. Mark each conduit 3 1/8" from the end (for 1" to 1 1/4" sizes), 3 3/8" from the end (for 1 1/2" sizes) or 3 7/8" from the end (for 2" sizes)

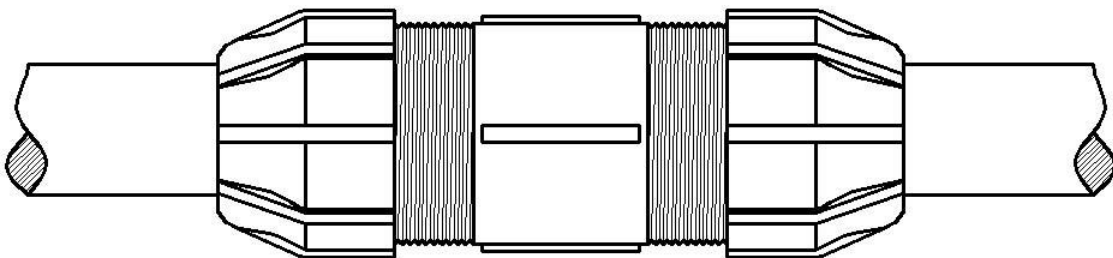

Push conduit into each end of Double E-Loc coupling body making sure the conduit is tight against the center stop.

